

E430 FUME EXTRACTOR

648-249-35-1 (120 V) / 648-249-35-2 (220 V)



★ HIGHLIGHTS

- ✓ Compact, Robust Single Station Exhaust
- ✓ Top Rated Flow Rate: 430 M³/h
- ✓ Filter Bag For Precious Alloy Recovery
- ✓ Includes HEPA & Odor Filters
- ✓ Supply Circuit: 120 V or 230 V



Shown: 1.2m Adjustable Arm

Shown: 2m PVC Hose



PN: 648-249-35-1 (120V)
648-249-35-2 (220V)

- ★ **Excellent for Laser Welding, Marking+Engraving, Cutting, Soldering, 3D Printing, Craft & D.I.Y.**
- ★ **Includes:**
 - ✓ 2 Meter High Strength PVC Flexible Exhaust Hose
 - ✓ 1.2 Meter High Strength Plastic Adjustable Arm
- ★ **Long-Lasting Variable Speed w/ Brushless Motor**
- ★ **HEPA Filter Captures 99.9% of Fine Particles**
- ★ **Odor Filter Removes Unpleasant Smoke and Smells**
- ★ **Bag Filters Capture Precious Alloys for Refining**

✓ Ideal for Welding, Cutting & Engraving Laser Apps

✓ Eliminates Toxic Fumes, Dust & Unpleasant Smells

✓ Provides Smoke, Air & Chemical Purification

✓ Removes Harmful Gases While Deodorizing The Air

✓ High Quality, Long Lasting, HEPA & Odor Filters

✓ Reduces The Contamination of Your Laser System

✓ Affordable, Easy To Change, Replacement Filters




LASERSTAR ACADEMY™

Our education courses are designed to provide you with a solid foundation of fundamental laser skill sets to immediately gain a revenue impact with your new laser device.

LaserStarAcademy.com

Technical Specifications at www.LaserStar.net

E430 FUME EXTRACTOR

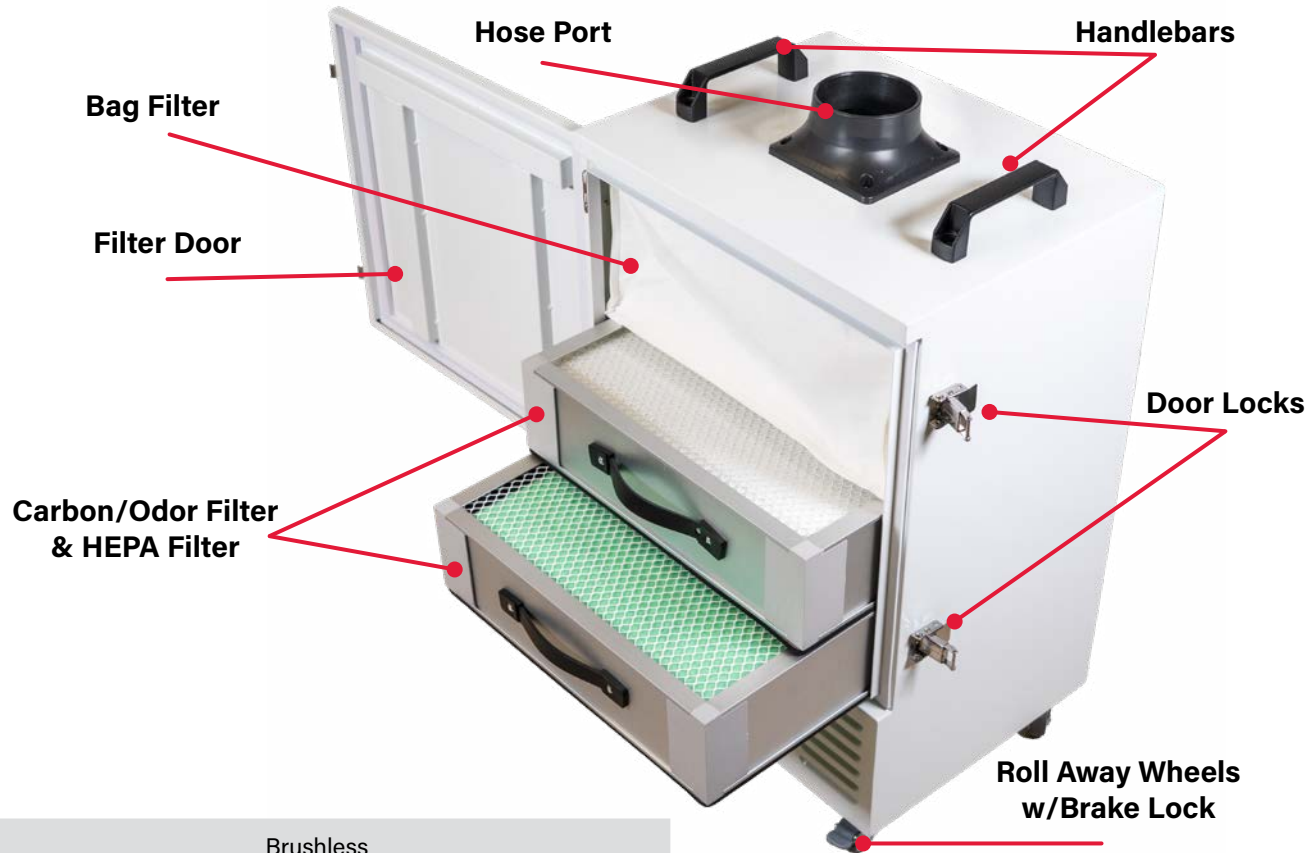

Motor	Brushless
Flow Rate	430 M ³ /h
Noise	<55 dB
Power	350 Watts
Hose Diameter	55 mm with Soft Endcaps
Filter	HEPA & Odor
Dimensions	310 mm x 400 mm x 660 mm (12.2" x 15.8" x 26")
Supply Circuit	120 V or 230 V, Single Phase
Warranty	1 Year



LASERSTAR.NET



LASERSTAR.NET



LASERSTAR
ACADEMY

LASERSTARACADEMY.COM



LASERSTAR TV

LASERSTAR.TV

LASERSTAR TECHNOLOGIES CORPORATION
1717 Diplomacy Row, Orlando, Florida 32809 USA
Phone: +1-407-248-1142 ★ Email: sales@laserstar.net